



Features

- 10.4" LCD Supports 800 x 600 Pixels
- Supports Full-function OSD Control Keys to Optimize the Display
- 15-pin D-sub Analog RGB 0.7Vp-p/75 Ohm Signal Input
- Optional 5 Wire Resistive Touch Screen

Introduction

The ODP-1000 embedded open frame display monitor offers a standard 10.4" TFT LCD screen supporting 800 x 600 pixels, a sturdy and ready to mount metal chassis, an optional 5 wire resistive touch screen. Each of the monitors come complete with signal input cables, an OSD control, and a power supply making it to ready to install into the end application.

The ODP-1000 is specially designed for commercial and industrial applications. It provides system resellers and solution integrators a wide choice of added value for their products, such as retail or ticketing kiosks, ATM, arcade games, vending machines, industrial equipment and instrumentation.

Specifications


Model Name	ODP-1000
Construction	Steel Chassis
Display	10.4" Color Active TFT Flat Panel Display
Luminance	230 cd/m ²
Viewing Angle	120 ° (R/L)
Resolutions	800 x 600, 262K colors
Backlight Lifetime	CCFL 1 tubes, 20,000 Hrs
OSD Controls	Automatic Screen, Setup (OSD), Brightness, Contrast, Horizontal/Vertical Position Color Temperature (9300K, 6500K, user)
External Power Adapter	AC Universal 12V/36W





Optional Touch Screen	5 Wire Resistive with USB Interface
Dimensions (WxDxH)	272 mm x 32 mm x 183 mm
Operating Temperature	0~50 °C (32~122 °F)
Storage Temperature	-20~60 °C (-4~140 °F)
Relative Humidity	10~90% @ 40 °C Non-condensing
Vibration	1G peak, 5~500Hz (Random)
Shock	15G peak acceleration (11 msec. Duration)

Dimensions

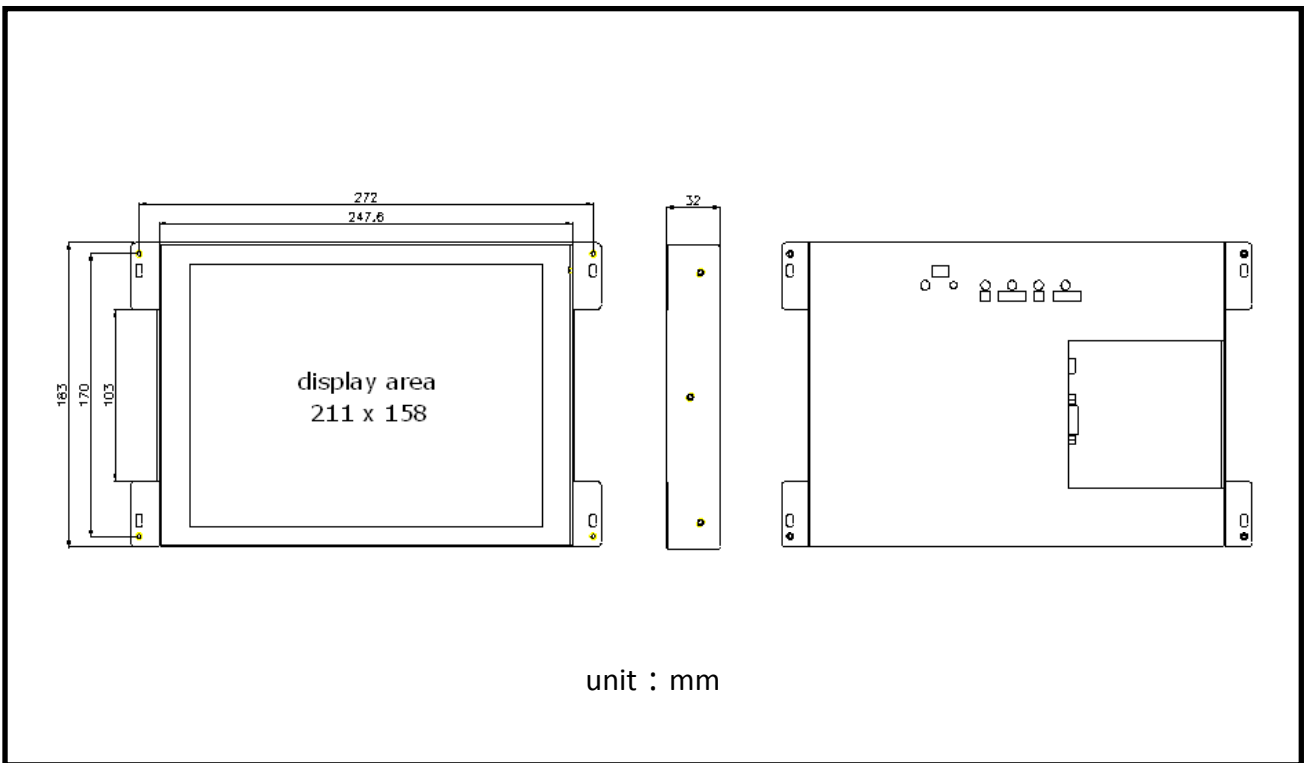

Ordering Information

ODP-1000	10.4" Open Frame Display Monitor
ODP-1001	10.4" Open Frame Display Monitor with 5 Wire Resistive Touch Screen

