



Features

- 17" LCD supports 1280 x 1024 pixels
- Supports full-function OSD control keys to optimize the display
- 15-pin D-sub analog RGB 0.7Vp-p/75 Ohm signal input
- Resistive touch screen (5 wire)

Introduction

The ODP-1700 Embedded open frame offer flexible options for LCD, signal interface and chassis mounting. The strengthened steel mechanical enclosure and optional tempered or vandal proof glass enables the ODP-1700 to withstand harsh environments.






Specifications

Model Name	ODP-1500
Display	17" Color Active TFT Flat Panel Display
Luminance	300 cd/m ²
Viewing angle	160 degrees (R/L)
Resolutions	1280 x 1024, 16.2m colors
Backlight Lifetime	CCFL 4 tubes, 50,000 Hrs
OSD Controls	Automatic Screen, Setup (OSD), Brightness, Contrast, Horizontal/Vertical Position Color Temperature (9300K, 6500K, user)
External Power Adapter	AC Universal 12V/36W
Construction	Steel chassis
Dimensions (WxDxH)	361 x 45 x 329.8 mm
Weight	TBA
Operating Temperature	0~50 °C (32~122 °F)
Storage Temperature	-20~60 °C (-4~140 °F)
Relative Humidity	8~95% @ 39 °C Non-condensing
Vibration	1.5G peak, 10~200Hz (Random)
Shock	50G peak acceleration (20 msec. Duration)
Touch Screen	5 wire Resistive (Optional)





Dimensions

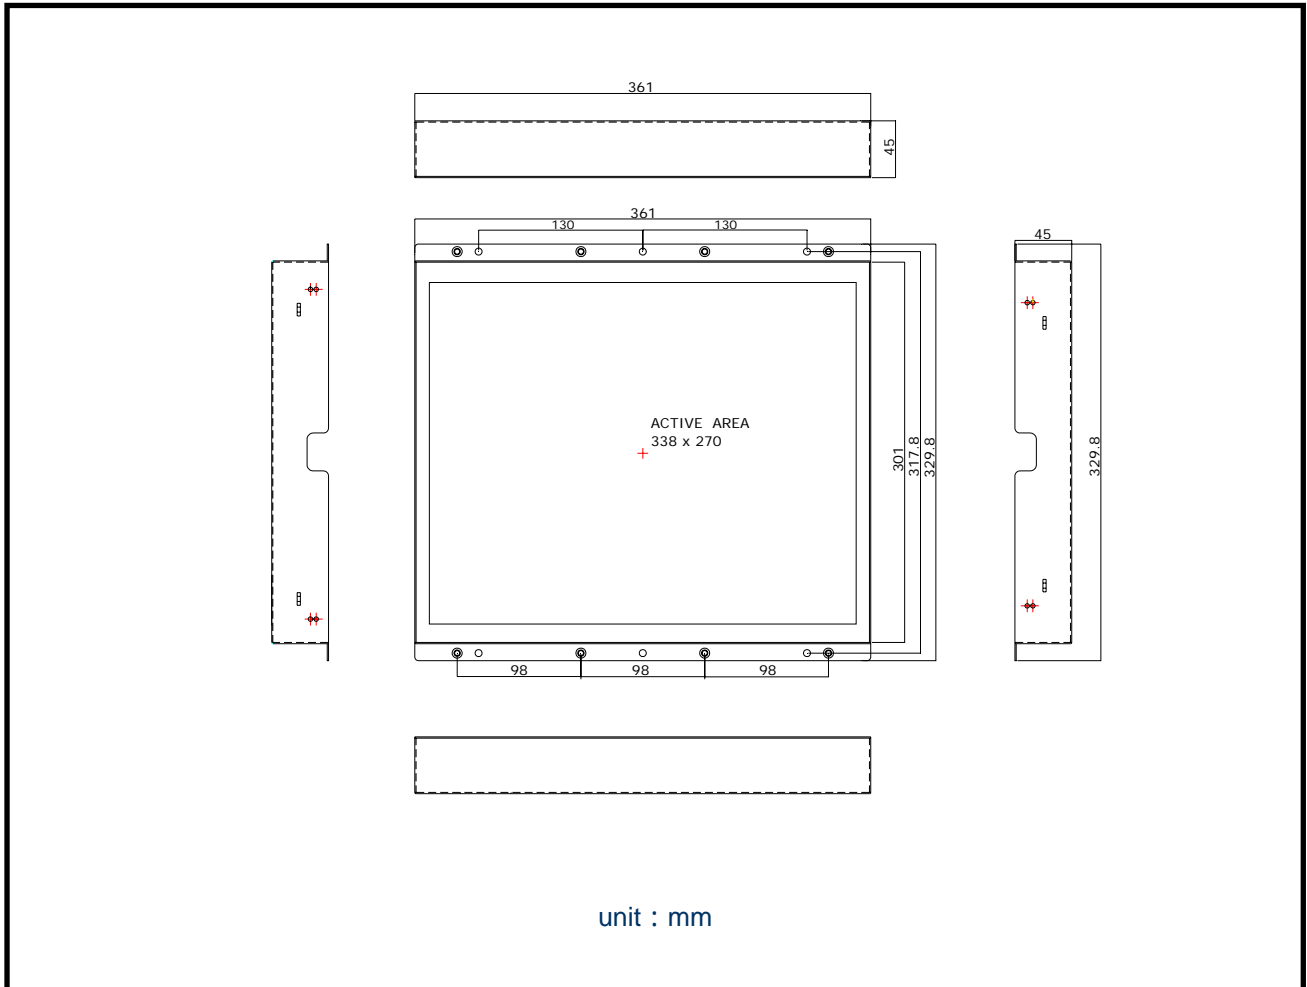

Ordering Information

ODP-1700	17" Open frame display monitor
ODP-1701	17" Open frame display monitor with Touch screen

